


ISOLATING AND CONTROL TRANSFORMER

Ratios: 400/230 V
380/220 V
220/24 V

Frequency: 50-60 Hz
Standard: IEC / BS EN 61558-2-4
ISO 9001:2015



Input/Output Windings are copper wire
Contact us to get information and about alternative Input/Output values.

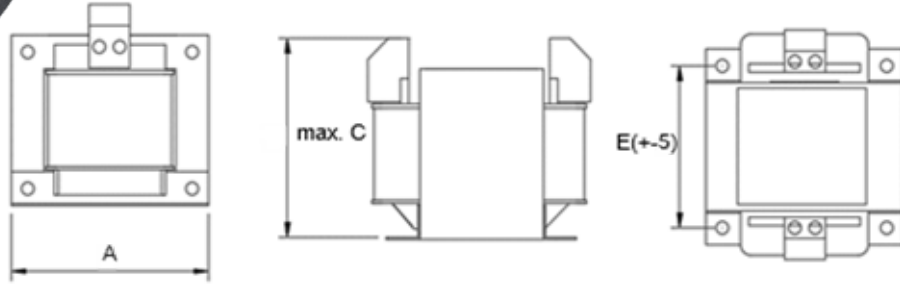

Type	Nominal Rating (VA)	Weight (kg)	Dimensions (mm)		
			A	E(+5)	Max.C
P-MGT 1P0020	20	0.65	80	68	89
P-MGT 1P0030	30	1.00	80	68	89
P-MGT 1P0050	50	1.60	84	62	92
P-MGT 1P0060	60	1.65	84	62	92
P-MGT 1P0100	100	2.35	84	77	92
P-MGT 1P0160	160	3.50	96	91	100
P-MGT 1P0200	200	3.75	96	91	100
P-MGT 1P0250	250	5.00	96	102	100
P-MGT 1P0300	300	6.50	120	90	130
P-MGT 1P0400	400	10.00	120	105	130
P-MGT 1P0500	500	11.25	120	125	130
P-MGT 1P0630	630	13.00	150	113	141
P-MGT 1P0800	800	18.00	150	130	141
P-MGT 1P1000	1000	26.50	150	143	141
P-MGT 1P1600	1600	28.50	171	173	210
P-MGT 1P2500	2500	32.00	215	215	225
P-MGT 1P5000	5000	49.00	250	143	225

Sanayi Mah. Sanayi Cad. Kurtköy Sanayi Sit. No:44 A Blok No: 64 Pendik/ İstanbul

